


TYPE 31 TORQUE REQUIREMENTS:
 3/16" DIA. = 35 TO 40 IN. LBS.
 1/4" DIA. = 70 TO 80 IN. LBS.
 3/8" DIA. = 200 TO 220 IN. LBS.
 1/2" DIA. = 400 IN. LBS.

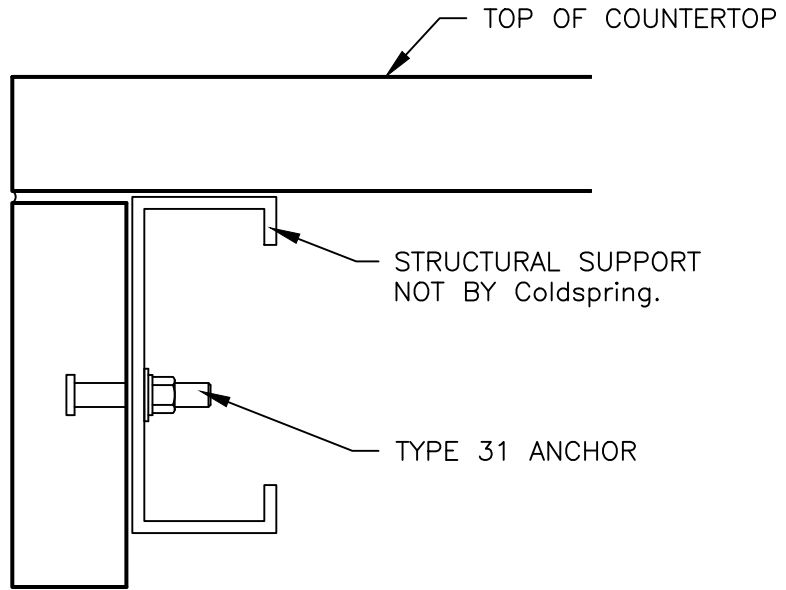

APRON SECTION

CONSIDERATIONS:
 PIECE SIZE

-KEEP APRON AND SPLASH LENGTHS FROM GETTING TOO LONG WHERE BREAKAGE IN FABRICATION, SHIPPING, AND INSTALLATION BECOME A PROBLEM.


JOINT SIZE

-CHECK BID QUALIFICATIONS
 -TIGHT JOINTS, 1/16" JOINTS, 1/8" JOINTS (PREFERRED), 1/4" JOINTS.

FRONT EDGE OF VANITY

-FOLLOW CONTRACT DOCUMENTS
 -STANDARD BLUNT EDGE, RADIUS EDGE, AND BEVELED EDGE.

HOLD SIDE SPLASH LENGTH BACK FROM FRONT EDGE OF VANITY TOP.
 SIDE SPLASH DOES NOT NEED TO FOLLOW VANITY PROFILE.

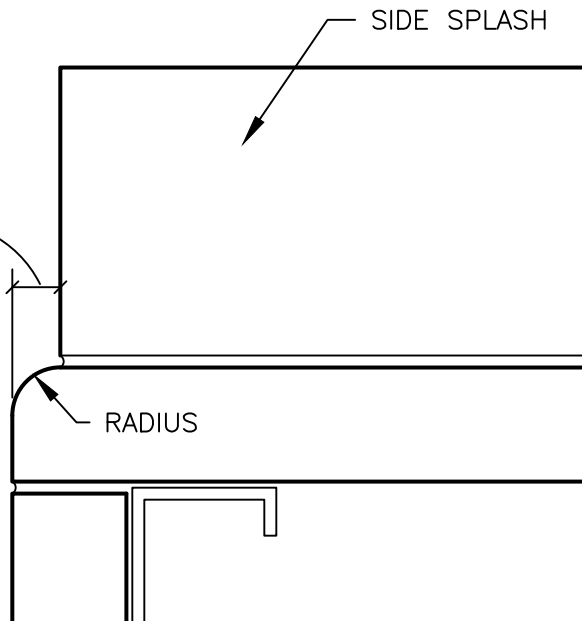

SIDE SPLASH/FRONT EDGE OF VANITY

DR-040(10Feb25)

DESCRIPTION:

VANITY APRON AND SIDE SPLASH

SHEET #:

SCALE:

6" = 1'-0"

DRAWN BY:

LB/KM

DATE:

3/10/2025



COLDSRING®

17482 GRANITE WEST ROAD, COLD SPRING, MN 56320
 PHONE 320.685.3621 | WWW.COLDSRINGUSA.COM